


# CABLE SPECIFICATION

NO. : HF20170217-21

Sectional view:

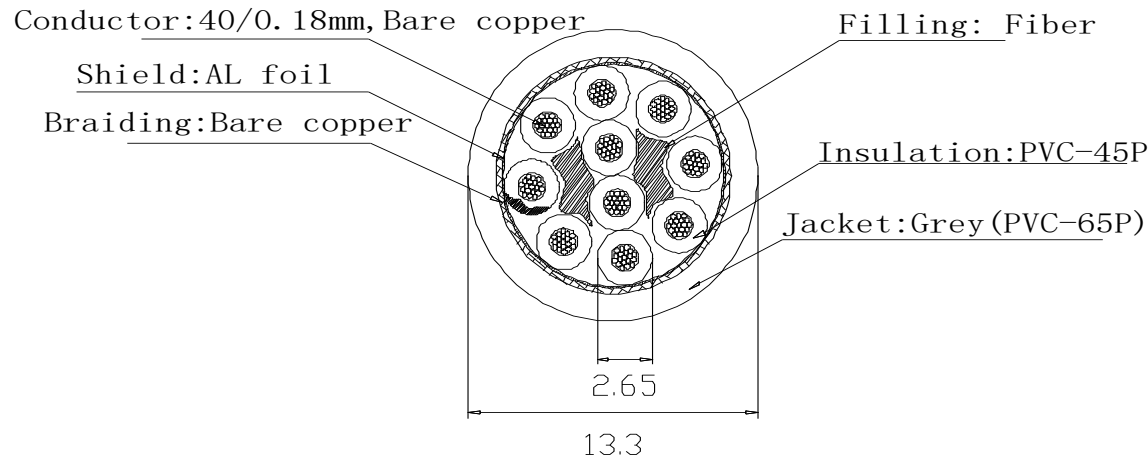

<b>Model</b>	RVVP 10×1.0mm <sup>2</sup>
<b>Conductor</b>	40/0.18mm, Bare copper
<b>Maximum conductor resistance Ω/KM (20℃)</b>	19.5
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.8mm
<b>Color</b>	Yellow/Green+9-core black (code 1-9)
<b>ID</b>	2.65±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	13.3±0.2mm
<b>Minimum insulation resistance (MΩ/KM)</b>	0.010
<b>Sheath thickness</b>	1.0mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing

Printing:  ALTEK KABEL SH-500 10G1.0 QMM/11010 300/500V 0011010 CE

Black word!

Customer Confirm:

Draw      Audit      Approved

**SHENZHEN HENGFENG WIRE&CABLE CO.,LTD.**