


CABLE SPECIFICATION

Sectional view:

NO. : HF20170217-24

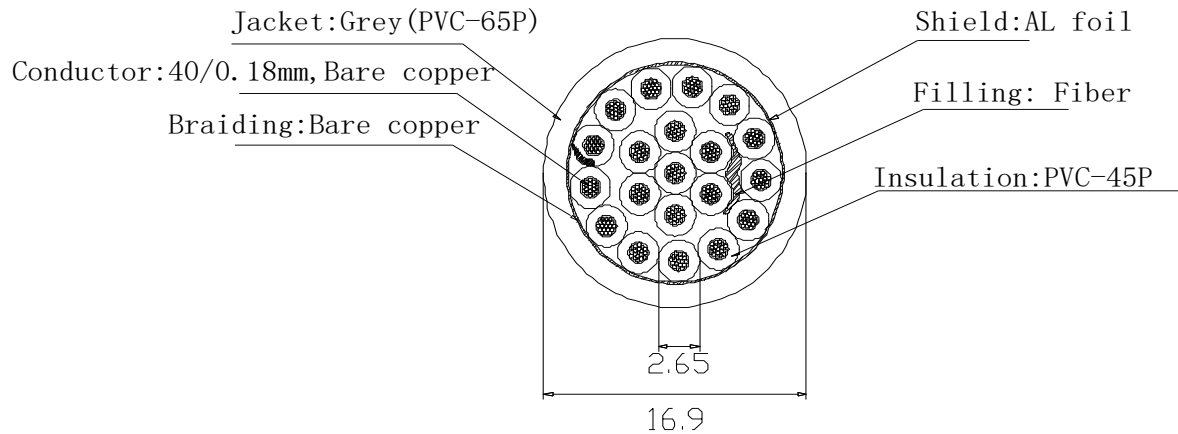

Model	RVVP 20×1.0mm ²
Conductor	40/0.18mm, Bare copper
Maximum conductor resistance Ω/KM (20℃)	19.5
Insulation	PVC-45P
Insulation Thickness	0.8mm
Color	Yellow/Green+19-core black (code 1-19)
ID	2.65±0.1mm
Filling	Fiber
Shield	CU / AL foil
Braiding	Bare copper
Jacket	Grey (PVC-65P)
OD	16.9±0.2mm
Minimum insulation resistance (MΩ/KM)	0.010
Sheath thickness	1.0mm
Rated voltage	0.3/0.5KV
Processing methods and use range	NO processing

Printing:  ALTEK KABEL SH-500 20G1.0 QMM/11020 300/500V 0012010 CE

Black word!

Customer Confirm:

Draw

Audit

Approved

SHENZHEN HENGFENG WIRE&CABLE CO.,LTD.