


# CABLE SPECIFICATION

NO.: HF20170214-12

Sectional view:

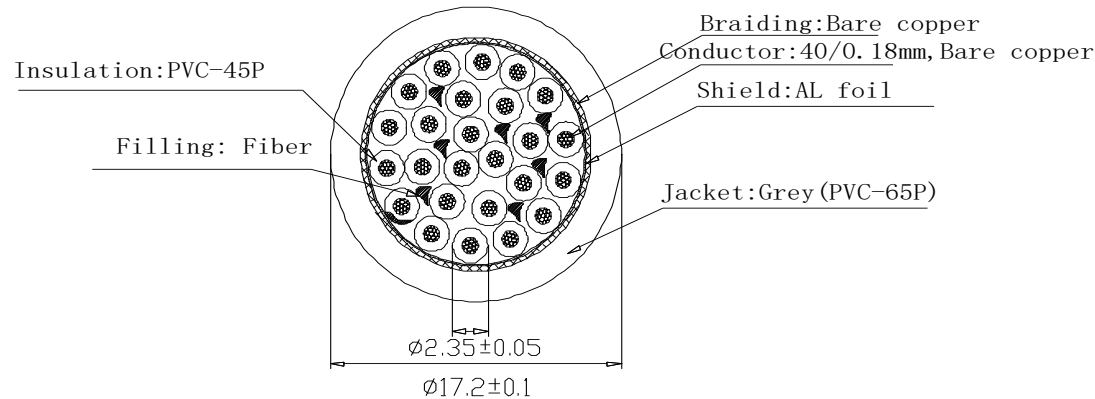

Printing:  ALTEK KABEL SH-500 25G0.75 QMM/17525 300/500V 0012575 CE

Black word!

<b>Model</b>	RVVP 25x0.75mm <sup>2</sup>		
<b>Conductor</b>	30/0.18mm, Bare copper		
<b>Maximum conductor resistance Ω/KM (20℃)</b>	26		
<b>Insulation</b>	PVC-45P		
<b>Insulation Thickness</b>	0.6mm		
<b>Color</b>	Yellow/Green+24-core black (code 1-24)		
<b>ID</b>	2.35±0.1mm		
<b>Filling</b>	Fiber		
<b>Shield</b>	CU / AL foil		
<b>Braiding</b>	Bare copper		
<b>Jacket</b>	Grey (PVC-65P)		
<b>OD</b>	17.2±0.5mm		
<b>Minimum insulation resistance (MΩ/KM)</b>	0.011		
<b>Sheath thickness</b>	0.8mm		
<b>Rated voltage</b>	0.3/0.5KV		
<b>Processing methods and use range</b>	NO processing		
<b>Draw</b>	<b>Audit</b>	<b>Approved</b>	<b>SHENZHEN HENGFENG WIRE&amp;CABLE CO.,LTD.</b>
<b>Customer Confirm:</b>			