


CABLE SPECIFICATION

NO. : HF20170213-01

Sectional view:

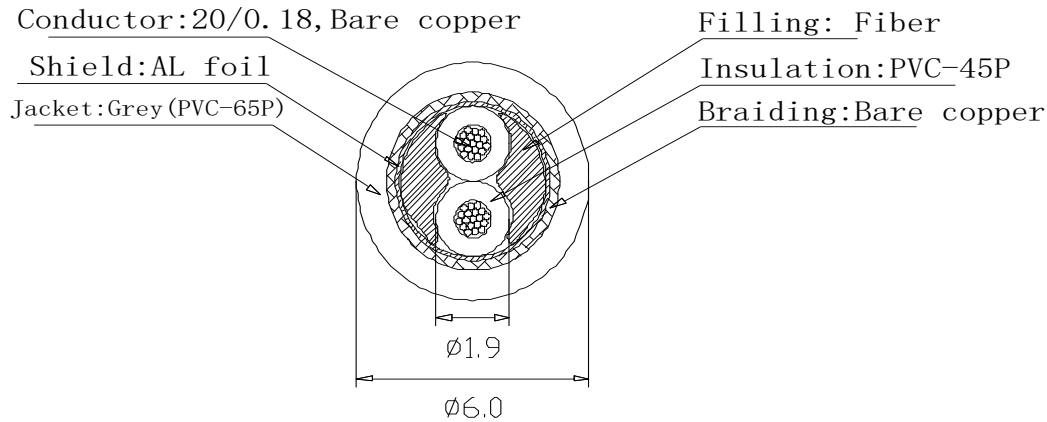

| | |
|--|---------------------------|
| Model | RVVP 2x0.5mm ² |
| Conductor | 20/0.18mm, Bare copper |
| Maximum conductor resistance Ω/KM (20°C) | 39 |
| Insulation | PVC-45P |
| Insulation Thickness | 0.5mm |
| Color | Brown, Blue |
| ID | 1.9±0.1mm |
| Filling | Fiber |
| Shield | CU / AL foil |
| Braiding | Bare copper |
| Jacket | Grey (PVC-65P) |
| OD | 6.0±0.2mm |
| Minimum insulation resistance (MΩ/KM) | 0.012 |
| Sheath thickness | 0.7mm |
| Rated voltage | 0.3/0.5KV |
| Processing methods and use range | NO processing |
| SHENZHEN HENGFENG WIRE&CABLE CO.,LTD. | |

Printing:  ALTEK KABEL SH-500 2G0.5 QMM/10052 300/500V 0010205 CE

Black word!

Customer Confirm:

| | | |
|-------------|--------------|-----------------|
| Draw | Audit | Approved |
| | | |