

CABLE SPECIFICATION

NO. : SH20190601-02

Sectional view:

Conductor: 20/0.18mm, Bare copper


Shield: AL foil

Jacket: Grey (PVC-65P)

Filling: Fiber

Insulation: PVC-45P

Braiding: Bare copper

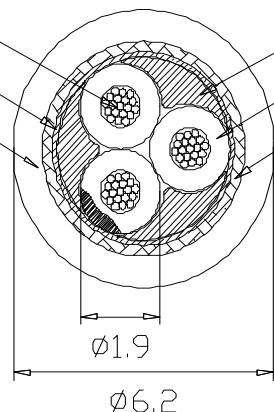

Printing:  ALTEK KABEL SH-500 3G0.5 QMM/10053 300/500V 0010305 CE

Black word!

Model	RVVP 3x0.5mm ²
Conductor	20/0.18mm, Bare copper
Maximum conductor resistance Ω/KM (20°C)	39
Insulation	PVC-45P
Insulation Thickness	0.5mm
Color	Brown、Blue、Yellow/Green
ID	1.9±0.1mm
Filling	Fiber
Shield	AL foil
Braiding	Bare copper
Jacket	Grey (PVC-65P)
OD	6.2±0.2mm
Minimum insulation resistance (MΩ/KM)	0.012
Sheath thickness	0.7mm
Rated voltage	0.3/0.5KV
Processing methods and use	NO processing

Customer Confirm:

Draw	Audit	Approved

SHENZHEN HAITULONG WIRE&CABLE CO.,LTD.