


# CABLE SPECIFICATION

NO. : HF20170217-16

Sectional view:

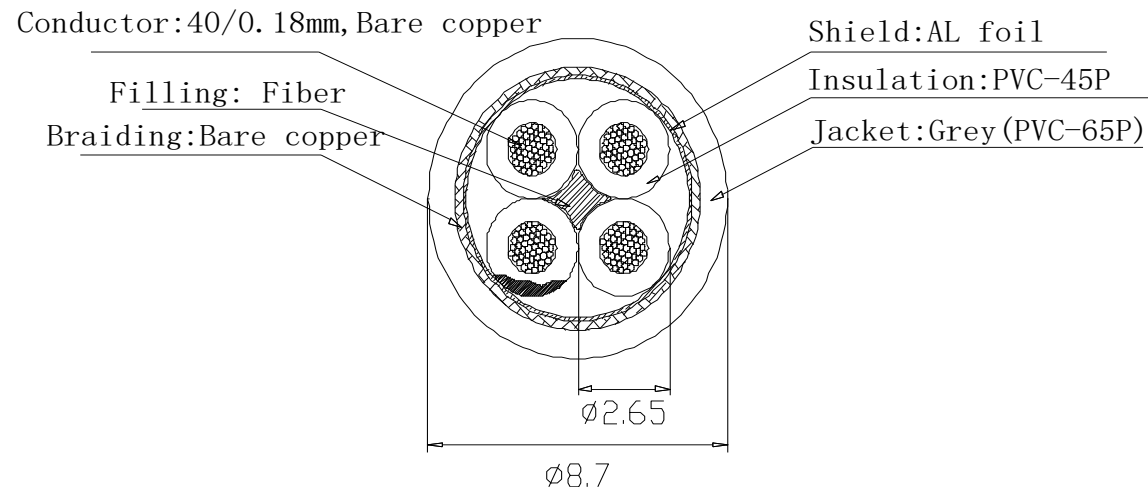

<b>Model</b>	SH-500 4×1.0mm <sup>2</sup>
<b>Conductor</b>	40/0.18mm, Bare copper
<b>Maximum conductor resistance <math>\Omega</math>/KM (20°C)</b>	19.5
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.8mm
<b>Color</b>	Brown、Blue、Yellow/Green、Black
<b>ID</b>	2.65±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	8.7±0.2mm
<b>Minimum insulation resistance (M<math>\Omega</math>/KM)</b>	0.010
<b>Sheath thickness</b>	1.0mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing

Printing:  ALTEK KABEL SH-500 4G1.0 QMM/10104 300/500V 0010410 CE

Black word!

Customer Confirm:

Draw

Audit

Approved

SHENZHEN HENGFENG WIRE&CABLE CO.,LTD.