

# CABLE SPECIFICATION

Sectional

NO. : HF20170217-17

Conductor: 40/0.18mm, Bare copper


Insulation: PVC-45P

Shield: AL foil

Jacket: Grey (PVC-65P)

Filling: Fiber

Braiding: Bare copper

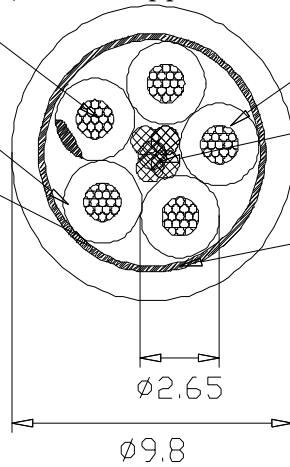

Printing:  ALTEK KABEL SH-500 5G1.0 QMM/10105 300/500V 0010510 CE

Black word!

<b>Model</b>	RVVP 5×1.0mm <sup>2</sup>
<b>Conductor</b>	40/0.18mm, Bare copper
<b>Maximum conductor resistance Ω/KM (20℃)</b>	19.5
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.8mm
<b>Color</b>	Brown、 Blue、 Yellow/Green、 black、 Grey
<b>ID</b>	2.65±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	9.8±0.2mm
<b>Minimum insulation resistance (MΩ/KM)</b>	0.010
<b>Sheath thickness</b>	1.0mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing
<b>Draw</b>	
<b>Audit</b>	
<b>Approved</b>	
<b>SHENZHEN HENGFENG WIRE&amp;CABLE CO.,LTD.</b>	

Customer Confirm: