

# CABLE SPECIFICATION

Sectional

NO. : HF20170217-30

Conductor: 60/0.18mm, Bare copper


Jacket: Grey (PVC-65P)

Insulation: PVC-45P

Filling: Fiber

Shield: AL foil

Braiding: Bare copper

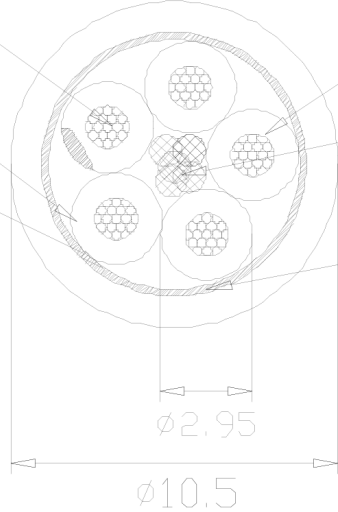

<b>Model</b>	SH-500 5×1.5mm <sup>2</sup>
<b>Conductor</b>	60/0.18mm, Bare copper
<b>Maximum conductor resistance Ω/KM (20°C)</b>	26.0
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.8mm
<b>Color</b>	Brown、 Blue、 Yellow/Green、 black、 Grey
<b>ID</b>	2.95±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	10.5±0.2mm
<b>Minimum insulation resistance (MΩ/KM)</b>	0.010
<b>Sheath thickness</b>	1.0mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing

Printing:  ALTEK KABEL SH-500 5G1.5 QMM/10115 300/500V 0010515 CE

Black word!

Customer Confirm:

<b>Draw</b>	<b>Audit</b>	<b>Approved</b>

**SHENZHEN HENGFENG WIRE&CABLE CO.,LTD.**