


# CABLE SPECIFICATION

NO. : HF20170217-18

Sectional view:

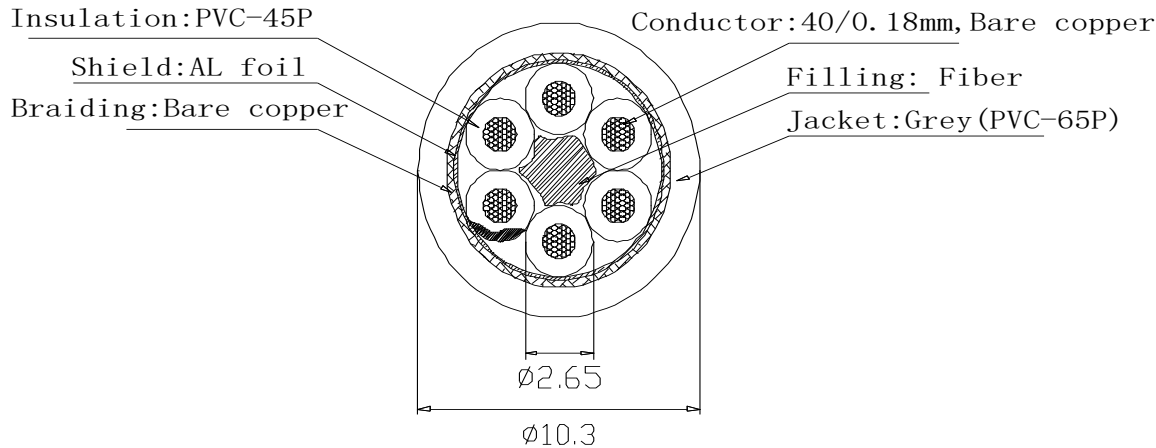

<b>Model</b>	RVVP 6×1.0mm <sup>2</sup>
<b>Conductor</b>	40/0.18mm, Bare copper
<b>Maximum conductor resistance Ω/KM (20℃)</b>	19.5
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.8mm
<b>Color</b>	Brown, Blue, Yellow/Green, black, Grey, Red
<b>ID</b>	2.65±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	10.3±0.2mm
<b>Minimum insulation resistance (MΩ/KM)</b>	0.010
<b>Sheath thickness</b>	1.0mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing
<b>SHENZHEN HENGFENG WIRE&amp;CABLE CO.,LTD.</b>	

Printing:  ALTEK KABEL SH-500 6G1.0 QMM/10106 300/500V 0010610 CE

Black word!

Customer Confirm:

<b>Draw</b>	<b>Audit</b>	<b>Approved</b>