


# CABLE SPECIFICATION

NO.: HF20170214-07

Sectional view:

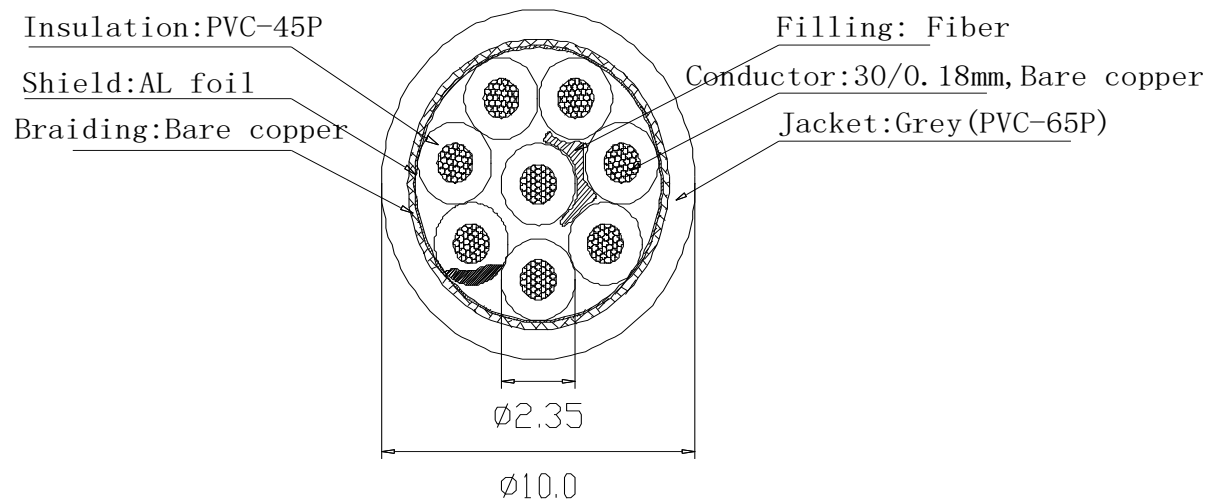

<b>Model</b>	SH-500 8x0.75mm <sup>2</sup>
<b>Conductor</b>	30/0.18mm, Bare copper
<b>Maximum conductor resistance Ω/KM (20°C)</b>	26
<b>Insulation</b>	PVC-45P
<b>Insulation Thickness</b>	0.6mm
<b>Color</b>	Yellow/Green+7-core black (code 1-7)
<b>ID</b>	2.35±0.1mm
<b>Filling</b>	Fiber
<b>Shield</b>	CU / AL foil
<b>Braiding</b>	Bare copper
<b>Jacket</b>	Grey (PVC-65P)
<b>OD</b>	10.0±0.2mm
<b>Minimum insulation resistance (MΩ/KM)</b>	0.011
<b>Sheath thickness</b>	0.8mm
<b>Rated voltage</b>	0.3/0.5KV
<b>Processing methods and use range</b>	NO processing

Printing:  ALTEK KABEL SH-500 8G0.75 QMM/10758 300/500V 0010875 CE

Black word!

Customer Confirm:

<b>Draw</b>	<b>Audit</b>	<b>Approved</b>

<b>Processing methods and use range</b>	NO processing
<b>SHENZHEN HENGFENG WIRE&amp;CABLE CO.,LTD.</b>	