


CABLE SPECIFICATION

Sectional view:

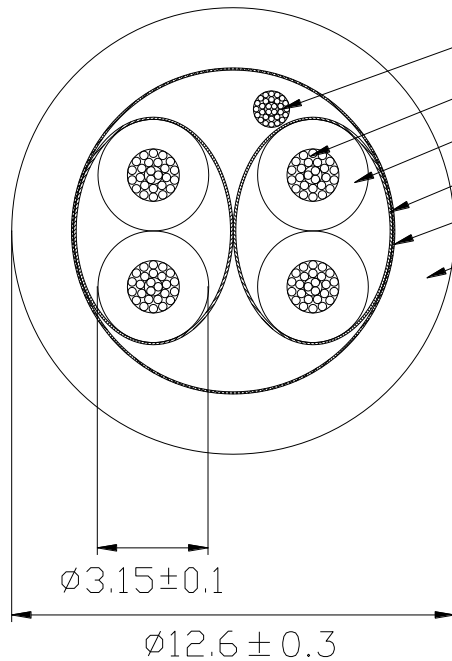

Ground wire: 23/0.18 Tinned copper stranding

Conductor: 26/0.24 Tinned copper stranding

Core: Black, transparent; Black, red (HDPE)

Wrapping: AL foil (conductive layer facing outward)

Wrapping: Mylar

Jacket: Grey (PVC-80P)

Coding content:



ALTEK KABEL 2PR 16AWG TWISTED SCREENED AUDIO & INSTRUMENTATION CABLE + Meter

Model	8760 2P×16AWG	
Conductor	26/0.24 Tinned copper stranding	
Maximum conductor resistance Ω / KM (20 °C)	14.9	
ID	3.15±0.1mm	
Core color	Black, transparent; Black, red	
Insulation Materials	HDPE	
Twisted pair	Black, transparent; Black, red	
Each pair wrapping	Aluminum foil (conductive layer facing outward)	
Synchronization completed	Stranding	Two pairs of twisted
	Ground wire	23/0.18 Tinned copper stranding
Wrapping	Mylar	
Jacket	Grey (PVC-80P)	
OD	12.6±0.3mm	
Sheath thickness	1.2mm	
Rated voltage	300/300V	
Processing methods and scope	Cabling project, without processing	
Customer Confirm:	SHENZHEN HAILUTONG WIRE&CABLE CO.,LTD	

Draw	Audit	Approved