

# CABLE SPECIFICATION

NO.: HF20170214-08

Sectional view:


Insulation: PVC-45P

Wrapping: foam film

Filling: Fiber

Conductor: 30/0.18mm, Bare copper

Jacket: Grey (PVC-65P)

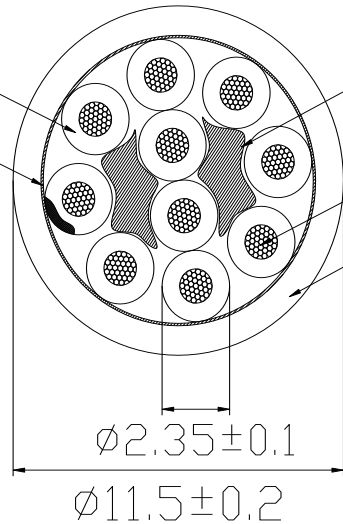

Printing:  ALTEK KABEL CT-500 10G0.75 QMM/17510 300/500V 0011075 CE

Black word!

|  |                                      |
|--|--------------------------------------|
| <b>Model</b>                                     | CT-500 10x0.75mm <sup>2</sup>        |
| <b>Conductor</b>                                 | 30/0.18mm, Bare copper               |
| <b>Maximum conductor resistance Ω/KM (20°C)</b>  | 26                                   |
| <b>Insulation</b>                                | PVC-45P                              |
| <b>Insulation Thickness</b>                      | 0.6mm                                |
| <b>Color</b>                                     | Yellow/Green+9-core black (code 1-9) |
| <b>ID</b>  | 2.35±0.1mm                           |
| <b>Filling</b>                                   | Fiber                                |
| <b>Wrapping</b>                                  | foam film                            |
| <b>Jacket</b>                                    | Grey (PVC-65P)                       |
| <b>OD</b>  | 11.5±0.2mm                           |
| <b>Minimum insulation resistance (MΩ/KM)</b>     | 0.011                                |
| <b>Sheath thickness</b>                          | 0.8mm                                |
| <b>Rated voltage</b>                             | 0.3/0.5KV                            |
| <b>Processing methods and use range</b>          | NO processing                        |
| <b>SHENZHEN HENGFENG WIRE&amp;CABLE CO.,LTD.</b> |                                      |

|             |              |                 |
|-------------|--------------|-----------------|
| <b>Draw</b> | <b>Audit</b> | <b>Approved</b> |
|             |              |                 |

Customer Confirm: